
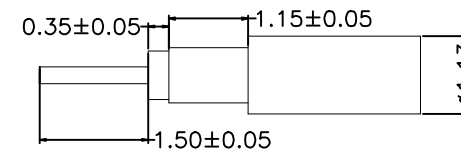



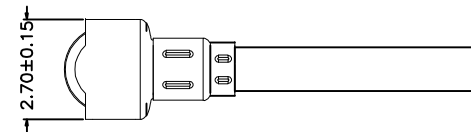
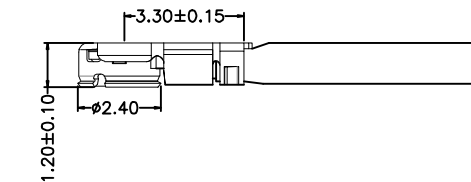
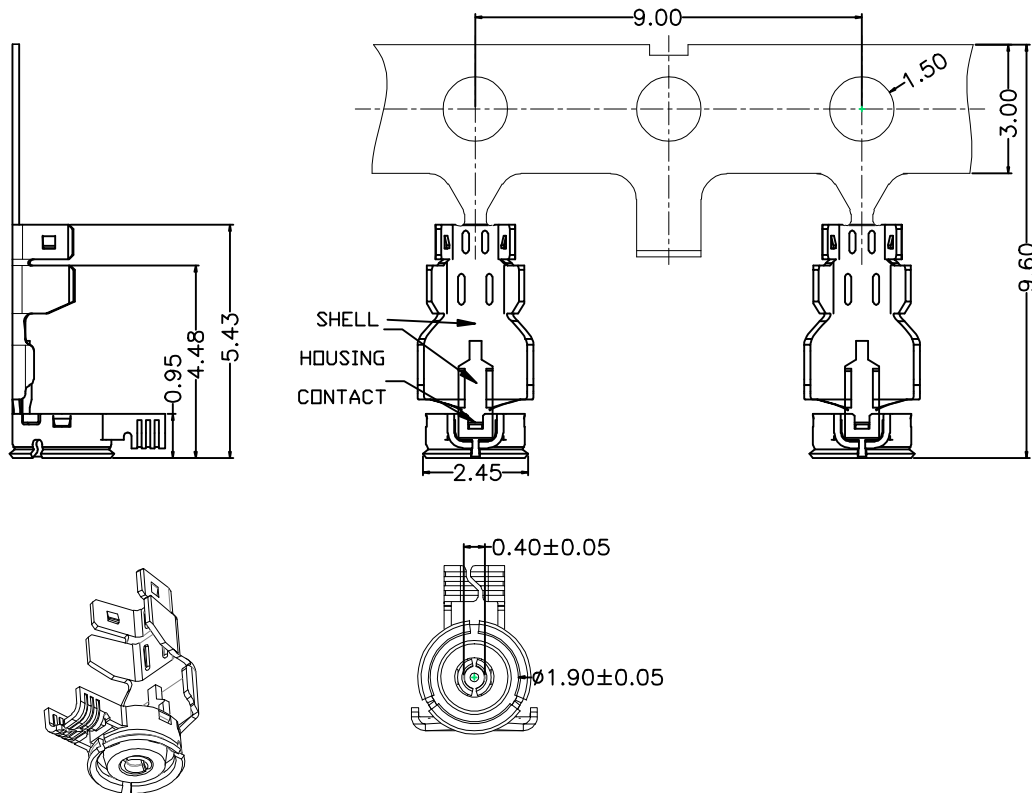


非汽车件


变更项目	变更内容	修改人	修改日期	客户版本	内部版本
新产品	新规范	陈杰	2012.5.22	A	A0




3	SHELL	COPPER ALLOY	GOLD PLATED OVER NI
2	CONTACT	COPPER ALLOY	GOLD PLATED OVER NI
1	HOUSING	PA66	UL94-0
NO	NAME	MATERIAL	DESCRIPTION

UNITS: mm		PART NO.: KS-MHF-A13-N-01	 昆山康硕电子科技有限公司 Suzhou Sunstone Electronics Technology Co., Ltd.		
X.±	X°±	APPD:	DWG NO.: MHF-A13-N-01		
.XX±0.2	.X°±0.1	CHKD:			
.XX±0.10	.XX°±	DR: EVAN			
.XXX±	.XXX°±				
				SCALE NONE	SHEET 1/2
				REV. A0	

非汽车件



PACKAGE DIRECTION



NOTES:

1. PERFORMANCE

1-1. ELECTRICAL CHARACTERISTICS;

1-1-1.VOLTAGE RATING: 60V AC/DC

1-1-2.CURRENT VS. TEP. RISE: 0.3A AC/DC,30°C RISE Max;

1-1-3.CONTACT RESISTANCE : INITIAL 20 MILLIOHMS Max;

AFTER ENVIRONMENTAL : 25 MILLIOHMS Max;

1-1-4.INSULATION RESISTANCE: 500 MEGOHMS Min.

1-1-5.DIELECTRIC WITHSTANDING VOLTAGE : 200V AC/Minute

1-1-6.VSWR : 1.5Max AT 6GHz

1-2. MECHANICAL CHARACTERISTICS;

1-2-1.MATING FORCE AND UNMATING FORCE,SEE ITEM

MATING FORCE: 3.0Kgf Max.



UNMATING FORCE: 0.2Kgf Min.

1-2-2.DURABILITY: 30 TIMES

1-3. ENVIRONMENT CHARACTERISTICS;

1-3-1.OPERATING TEMPERATURE : -30°C TO +80°C;

1-3-2.STORAGE TEMPERATURE : -45°C TO +85°C;

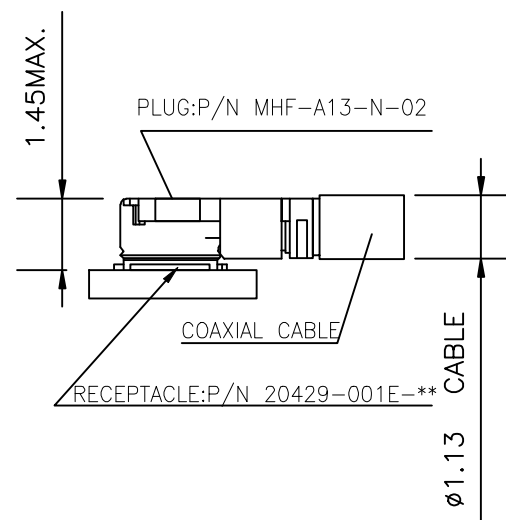

PLUG:P/N MHF-A13-N-02

COAXIAL CABLE


RECEPTACLE:P/N 20429-001E-**

ø1.13 CABLE

2. CABLE RETENTION FORCE:0.8Kgf Min

3. HARMFUL MATERIAL CONTROL PLEASE FOLLOW RoHS COMPLIANT.

3	SHELL	COPPER ALLOY	GOLD PLATED OVER NI
2	CONTACT	COPPER ALLOY	GOLD PLATED OVER NI
1	HOUSING	PA66	UL94-0
NO	NAME	MATERIAL	DESCRIPTION

UNITS: mm		PART NO.: KS-MHF-A13-N-01	 昆山睿峰电子科技有限公司 Ruifeng Electronics Technology Co., Ltd.						
X.±	X'±								
.X± 0.2	.X'±0.1	APPD:	DWG NO.: MHF-A13-N-01						
.XX±0.10	.XX'±	CHKD:							
.XXX±	.XXX'±	DR: EVAN	 <table><tr><th>SCALE</th><th>SHEET</th><th>REV.</th></tr><tr><td>NONE</td><td>2/2</td><td>A0</td></tr></table>	SCALE	SHEET	REV.	NONE	2/2	A0
SCALE	SHEET	REV.							
NONE	2/2	A0							